

11/08/00  
JC955 U.S. PTO

11/09/00


A

Customer No. 000959

Case Docket No. SMQ-034

THE ASSISTANT COMMISSIONER FOR PATENTS  
Box Patent Application  
Washington, D.C. 20231

JC914 U.S. PTO  
09/708822  
11/08/00

"Express Mail" Mailing Label Number EL589739964US  
Date of Deposit November 8, 2000  
I hereby certify that this transmittal letter and the papers referred to as being enclosed therein are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.  
  
Signature \_\_\_\_\_  
Ilidio P. Cardoso  
Please Print Name of Person Signing \_\_\_\_\_

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Yvetta D. Pols Sandhu et al.

For: RACK SECURITY MECHANISM

Enclosed are:

- ☐ This is a request for filing a ☐ continuation ☐ divisional application under 37 CFR 1.53(b), of pending prior application serial no. \_\_\_\_\_ filed on \_\_\_\_\_ entitled \_\_\_\_\_.
- ☒ 1 cover page.
- ☒ 8 pages of specification, 5 pages of claims, 1 pages of abstract.
- ☒ 8 sheets of drawings.
- ☒ A Declaration, Petition and Power of Attorney.
- ☒ An assignment of the invention to SUN MICROSYSTEMS, INC. A recordation form cover sheet (Form PTO 1595) is also enclosed.
- ☐ A verified statement to establish small entity status under 37 C.F.R. 1.9 and 37 C.F.R. 1.27.
- ☐ Other \_\_\_\_\_

The filing fee has been calculated as shown below:

(Col. 1)		(Col. 2)	SMALL ENTITY		OR	OTHER THAN SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE		RATE	FEE
BASIC FEE	////////////////////		////////	\$	OR	////////	\$ 710
TOTAL CLAIMS	34 - 20	= 14	x 9=	\$	OR	x 18=	\$ 252
INDEP. CLAIMS	4 - 3	= 1	x 40	\$	OR	x 80	\$ 80
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED			+135	\$	OR	+270	\$
			TOTAL	0	OR	TOTAL	\$1042.00

\* If the difference in Col. 2 is less than zero, enter "0" in Col. 2.


- ☐ Please charge my Deposit Account No. 12-0080 in the amount of \$.  
A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$ \$1042.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 12-0080.  
A duplicate copy of this sheet is enclosed.

- ☒ Any additional filing fees required under 37 C.F.R. 1.16.
- ☒ Any patent application processing fees under 37 C.F.R. 1.17.
- ☐ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 12-0080.  
A duplicate copy of this sheet is enclosed.
- ☐ Any patent application processing fees under 37 C.F.R. 1.17.
- ☐ The issue fee set in 37 C.F.R. 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).
- ☐ Any filing fees under 37 C.F.R. 1.16 for presentation of extra claims.
- ☒ A check in the amount of \$ 40.00 to cover the recording of assignment documents is also enclosed.
- ☒ Address all future communications (May only be completed by applicant, or attorney or agent of record) to Kevin J. Canning at **Customer Number: 000959** whose address is:

Lahive & Cockfield, LLP  
28 State Street  
Boston, Massachusetts 02109

Date: November 8, 2000

LAHIVE & COCKFIELD, LLP  
Attorneys at Law

By   
Sean D. Detweiler, Esq.  
Reg. No. 42,482  
28 State Street  
Boston, MA 02109  
(617) 227-7400  
Telecopier (617) 742-4214

United States Application Entitled  
RACK SECURITY MECHANISM

Inventors: Yvette D. Pols Sandhu, Jonathan A. Colprit  
and Robert S. Antonuccio

## **RACK SECURITY MECHANISM**

### **FIELD OF THE INVENTION**

5           The invention relates to a computer component rack and more particularly to a system for locking an individual tray mounted within a computer component rack.

### **BACKGROUND OF THE INVENTION**

10           Where there is a demand for multiple computer components in compact areas, component racks are often provided for slidably mounting components. Each component typically is attached to a tray, and the tray is positioned in the rack where it is able to captively slide. If a user needs to gain access to a particular component, the tray is slid out of the component rack, providing the desired access. Once the user is  
15 finished with the component, the tray is slid back into the component rack. Often threaded fasteners (such as, e.g., screws) secure the tray to the rack in a closed position. However, this approach poses a security risk as any party with a screwdriver can open the rack tray by unscrewing the fasteners and pulling out the tray. Once the tray is pulled out, the party has full access to the component stored in the tray, and the party  
20 may remove such components at will. For the foregoing reasons, there is a need for an apparatus and system for better securing the tray in the closed position within the component rack.

### **SUMMARY OF THE INVENTION**

25           The following briefly describes some embodiments of the present invention. A locking cover is provided for a component rack. At least one lock mechanism is mounted within the cover. There is also a track for supporting a sliding security plate. The lock mechanism couples with the sliding security plate, such that when activated,  
30 the lock mechanism extends the sliding security plate laterally from an end of the cover to block an access aperture, and thus access to one or more fasteners holding the tray in place.

Embodiments of the locking cover in example applications include the use of the cover in the following scenarios as an element of a locking system for a component rack. The rack has within it a slidably mounted tray. The tray anchors to the component rack in a closed position with at least one fastener. In general, removal of the tray typically  
5 requires access to and removal of at least one fastener. A cover mounts to the tray. The cover includes within its structure a locking mechanism. The general functional requirement of the locking mechanism is that it prevents access through an access port to at least one fastener while in a locked position, and allows access through the access port to the at least one fastener while in an unlocked position.

10

According to one aspect of the invention, the fastener is a threaded fastener, such as a screw or bolt.

According to one aspect of the invention, the locking mechanism is a key lock.  
15 The internal workings of the key lock include a pawl, a track, and a sliding security plate, such that when the key lock rotates toward a locked position, the pawl slides the security plate along the track. This action covers the at least one fastener anchoring the tray.

20 In two further embodiments of the invention, the locking mechanism is either a combination lock, or a padlock.

The position of the actual locking mechanism can vary. The locking mechanism can reside at one end of the cover, proximal to the at least one fastener. Alternatively,  
25 the locking mechanism can reside distal from the at least one fastener, in which case the sliding security plate extends to cover the fastener or fasteners.

According to another aspect of the invention, the tray anchors to the component rack with two threaded fasteners proximal to a first end of the cover. The  
30 tray could additionally be anchored to the component rack with at least one threaded fastener proximal to a second end of the cover, if desired.

In one embodiment of the invention, the cover forms a handle for

pulling and pushing the tray in and out of the component rack. Both the cover and the security plate could be made of any number of materials including plastic and metal.

## 5 **BRIEF DESCRIPTION OF THE DRAWINGS**

The aforementioned features and advantages, and other features and aspects of the present invention, will become better understood with regard to the following description and accompanying drawings, wherein:

10 **FIG. 1** is a perspective view of a tray and lockable cover according to one embodiment of the present invention;

**FIG. 2** is a perspective view of a single rack containing multiple components and a single cover according one embodiment of the present invention;

15 **FIG. 3** is a perspective view of a cutout portion of a rack and cover according to another embodiment of the present invention;

**FIG. 4** is a schematic diagram of one end of a cover according to one embodiment of the present invention;

**FIG. 5** is a schematic diagram of internal workings at one end of the cover according to one embodiment of the present invention;

20 **FIG. 6** is a perspective view of additional lock configurations to additional embodiments of the present invention;

**FIG. 7** is yet another perspective view of a lock mechanism and cover according to one embodiment of the present invention; and

25 **FIG. 8** is still another perspective view of another lock configuration and cover according to an additional embodiment of the present invention.

## **DETAILED DESCRIPTION OF THE INVENTION**

30 The present invention includes a cover 10 for a tray 14 of a computer component rack 12. The cover 10 mounts to a front facing side of the tray 14, which slides in and out of the component rack 12. The structure of the cover 10 lends itself to being used as a handle for moving the tray 14. The trays 14 are often removably fastened to the component racks 12 in closed positions by threaded fasteners 28. An added feature of

the cover 10 is that it includes a locking mechanism 16, which inhibits access to the threaded fasteners 28 when in a locked position.

Referring now in detail to the drawings wherein like parts are designated by like reference numerals throughout, **FIGS. 1-8** illustrate example embodiments of a locking system for a component rack according to the present invention. Although the present invention will be described with reference to the example embodiments illustrated in the figures it should be understood that the present invention can be embodied in many alternative forms of embodiment. In addition, any suitable size, shape, or type of elements or materials could be utilized.

According to one embodiment of the present invention, **FIG. 1** shows the tray 14 for holding one or more components 30. The tray 14 is made of a suitable material, such as, e.g., steel or plastic. The tray 14 is sized and shaped to hold components manufactured by, e.g., Sun Microsystems, Inc., and fit within a component rack 12 (FIG. 2). A cover 10 mounts along a front facing portion of the tray 14. As illustrated, the cover 10 extends the length of the tray 14 face. However, the cover 10 need not extend in this manner. The cover 10 can mount to merely a portion of the face of the tray 14, thus being shorter in length.

A key lock 20, for securely locking the tray 14, resides within the cover 10. There is an access port 18 at one end of the cover 10. The access port 18 provides access to a threaded fastener or fasteners 28, which removably fasten the tray 14 in a closed position. Through internal workings of the key lock 20, as discussed at a later point herein, when a user inserts a key (not shown) into the key lock 20 and rotates the key, a sliding security plate 26 moves in a lateral direction between a locked position and an unlocked position. In the locked position, the sliding security plate 26 substantially covers access port 18 (FIG. 2) and threaded fastener 28. As a result, the threaded fastener 28 is no longer accessible via that access port 18. The security plate 26 is shown as a solid metal plate. However, it may be of a porous nature, meshed, grided, perforated, or other configuration, so long as it maintains the required strength and rigidity to serve as a significant hindrance to the access port 18. The security plate 26 can also be of another material, such as, e.g., polymeric materials like plastic or

composite, or ceramic materials. Further, the security plate 26 could slide laterally, or alternatively move in other ways such as sliding vertically, rotating, pivoting, or even closing in from multiple directions as separate pieces. Even further, the shape of the security plate 26 can vary from the straight rectangular shape, to a square, triangle,  
5 pentagon, octagon, etc., in planar, and non-planar variations.

**FIG. 2** illustrates one application of the present invention where multiple components 30 mount within a component rack 12. These components 30 may include a variety of items. For example, each component 30 may be computer-related hardware, a fan, a group of fans, a data storage device, or an electronic device. A tray 14, as  
10 illustrated in **FIG. 1**, supports each of the components 30. The tray 14 shown is merely an example of a relatively standard type of tray utilized in the computer industry. It has four walls and a floor. The side walls include bearings that allow the sides to slidingly extend and retract. In various locations throughout the tray 14, there are a plurality of  
15 mounting edges and apertures for fixing the tray 14 within a structure in various ways. Multiple other variations of trays 14 are possible. Each of the trays 14 anchors to the component rack 12 in a closed position with at least one threaded fastener 28. A cover 10 resides on a front facing side of the tray 14 that is accessible by the user and that allows the user to install and remove trays 14 as desired.

20 In one embodiment, the cover 10 mounts to the front facing side of the tray 14 with four screws (not shown). The screws are attached through a back side of the front facing side of the tray 14 and are screwed into a backside of the cover 10. Thus, if the tray 14 is in a closed and locked position, there is no access to the screws to unscrew and  
25 remove the cover 10. To gain access to the screws, one must be able to pull open the tray 14 and reach around to the back side of the front facing side of the tray 14.

In the embodiment shown in **FIG. 2**, the cover 10 has the additional feature of being shaped in the form of a handle to assist the user in the extension and retraction of a  
30 tray 14. When the user desires to stow the tray 14, the user places his or her hand around the cover and exerts the required force on the cover 10 to retract the tray 14 into a closed position. Alternatively, when the user desires to gain access to the contents of

the tray 14, the user grabs on to the handle structure of the cover 10 and pulls the tray 14 outward from the rack 12.

5 The locking mechanism 16 resides at one end of the cover 10, such that when rotated, the sliding security plate 26 extends over a portion of the tray 14 and the component rack 12, covering the access port 18 to the threaded fastener 28. Thus, a screwdriver cannot be used to remove the threaded fastener 28.

10 The number and type of fasteners employed in practicing the present invention can vary. For example, as illustrated in **FIG. 3**, there may be multiple threaded fasteners 28 provided to anchor the tray 14 in a closed position. Alternatively, clip-type fasteners, squeeze fasteners, rotate-to-lock fasteners, shaft-and-pin fasteners, and myriad other removable fasteners in any number may be utilized to anchor tray 14 in place as desired, so long as the sliding security plate 26 can extend across the access port 18, blocking  
15 access to the fastener as desired.

**FIGS. 4 and 5** illustrate the end of the cover 10 according to one embodiment of the present invention. In this example, the internal components of the locking mechanism function as follows. A user first inserts a key (not shown) into key lock 20. The key lock 20 couples to a pawl 22, which in turn couples to the sliding security plate 26. As the user rotates the key lock 20, the rotational energy translates to the pawl 22 which moves the sliding security plate 26 in a lateral direction depending upon the direction of rotation of the key lock 20. In a first rotational direction (e.g., in the direction of arrow A in **FIG. 5**), the sliding security plate 26 laterally moves to cover the  
20 access port 18. Once in a fully extended (“locked”) position, the sliding security plate 26 substantially covers the threaded fastener 28 (or fasteners), inhibiting access to the threaded fastener 28. A track 24 provides the required support for the sliding security plate 26 to sufficiently position and hold the sliding security plate 26 in place. In practice, at such time, the user then removes the key from the key lock 20 leaving the  
25 cover 10 and sliding security plate 26 in a closed and locked position. The sliding security plate 26 blocks access to the threaded fastener 28, thus inhibiting a potential infiltrator from removing the threaded fastener 28 and gaining unauthorized access to the tray 14 and components 30.  
30

If the user desires to gain access to the tray 14 and the particular component 30 stored within, the procedure just described is reversed. The user inserts a key into the key lock 20 and rotates the key lock 20 in a second rotational direction (e.g., in the direction of arrow B in **FIG. 5**). This causes the pawl 22 to retract the sliding security plate 26 until the sliding security plate 26 fully retracts and access to the threaded fastener 28 is once again available through access port 18. At such time, the user then proceeds with the removal of the particular fastener or fasteners 28 anchoring the tray 14 in place, and pulls out the tray 14.

The position and number of the locking mechanism 16 can also vary. For example, as illustrated in **FIG. 6**, there may be multiple locking mechanisms 16 located at either end of the cover 10. Alternatively, a single locking mechanism 16 may be positioned in a more central location along the cover 10. In such an instance, the internal lock workings include a pawl 22 that couples to a longer sliding security plate 26 such that the end of the sliding security plate 26 can extend to the access port 18 and cover the threaded fastener 28 as desired. The locking mechanism 16 may also be positioned such that the sliding security plate 26 can extend beyond the fasteners to engage with the component rack 12 and hold the tray 14 in place in addition to blocking access to the fasteners 28.

Further, the type of locking mechanism 16 may also vary. For example, according to **FIG. 7**, the locking mechanism may be in the form of a combination lock 21. To gain access to the tray 14, the user would first enter in the required combination, then slide the sliding security plate 26 until the access port 18 reveals the particular fastener or fasteners 28. Again, the user would remove the fastener or fasteners 28 and pull out the tray 14.

In still another variation of locking mechanism, **FIG. 8** depicts a locking mechanism 16 in the form of a padlock 32. In this figure, on the left side of the cover 10 illustrates the lock mechanism with the padlock removed, while on the right side of the cover 10 the illustration shows the padlock 32 locking the sliding security plate 26 in place. One should note that the use of two locking mechanisms, one on either end of the

cover 10, while possible, is not a requirement and is merely for illustrative purposes only to show the locked and unlocked positions in a padlock-based mechanism. To gain access to a tray 14 with this form of lock, the user first unlocks and removes the padlock 32. Then the user then slides the security plate 26 by the lock aperture 34 until the  
5 access port 18 reveals itself. To lock the cover 10, the user slides the security plate 26 over access port 18, joining the lock holes 34. The user then threads the padlock 32 through the lock apertures 34 and locks the padlock 32, thus locking the cover 10.

Numerous modifications and alternative embodiments of the invention will be  
10 apparent to those skilled in the art in view of the foregoing description. Accordingly, this description is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the best mode for carrying out the invention. Details of the structure may vary substantially without departing from the spirit of the invention, and exclusive use of all modifications that come within the scope of the appended claims is  
15 reserved. It is intended that the invention be limited only to the extent required by the appended claims and the applicable rules of law.

Claims

What is claimed is:

- 5     1. A locking cover for a component rack, comprising:  
         at least one lock mechanism mounted within said cover;  
         a track for slidably supporting a sliding security plate extendable beyond one  
         end of said cover; and  
         wherein said lock mechanism is coupled with said sliding security plate, such  
10     that said lock mechanism extends said sliding security plate laterally from said  
         one end of said cover.
- 15     2. The locking cover according to claim 1, wherein said locking mechanism is  
         comprised of a key lock, a pawl, a track, and said sliding security plate, such that  
         when said key lock is rotated toward a locked position, said pawl slides said  
         security plate along said track, covering said at least one fastener of said tray.
- 20     3. The locking cover according to claim 1, wherein said locking mechanism is a  
         combination lock coupled with said sliding security plate slidably mounted in a  
         track.
4. The locking cover according to claim 1, wherein said locking mechanism is a padlock  
         and said sliding security plate is slidable along a track.
- 25     5. The locking cover according to claim 1, wherein said locking mechanism is  
         positioned at one end of said cover, proximal to said at least one fastener.
6. The locking cover according to claim 1, wherein said locking mechanism is  
         positioned distal from said at least one fastener, and said sliding security plate  
30     extends to cover said at least one fastener when in a locked position.
7. The locking cover according to claim 1, wherein said cover forms a handle for  
         pulling and pushing said tray in and out of said component rack.

8. The locking cover according to claim 1, wherein said cover is made of a plastic material.
- 5 9. The locking cover according to claim 1, wherein said sliding security plate is made of a metal material.
10. The locking cover according to claim 1, wherein said sliding security plate is made of a plastic material.
- 10 11. A locking system for a component rack, comprising:  
at least one tray slidably mounted within a component rack;  
at least one fastener removably anchoring said tray to said component rack in a retracted position;  
15 a cover on a front-facing portion of said at least one tray; and,  
at least one lock mechanism mounted within said cover, said lock mechanism coupled with a sliding security plate extendable to block an aperture that provides access to said at least one fastener.
- 20 12. The system according to claim 11, wherein said at least one tray supports several components.
13. The system according to claim 11, wherein said cover includes a plurality of said lock mechanisms.
- 25 14. The system according to claim 11, wherein said at least one lock mechanism is a key-based lock.
15. The system according to claim 11, wherein said at least one lock mechanism is a combination-based lock.
- 30 16. The system according to claim 11, wherein said at least one lock mechanism is a padlock-based lock.

17. The system according to claim 11, wherein said cover is made of a plastic material.
18. The system according to claim 11, wherein said cover is shaped to serve as a handle  
5 for placement of said at least one tray within said rack.
19. A locking system for a component rack, comprising:  
a tray slidably mounted within said component rack, said tray anchored to said  
component rack in a closed position by at least one fastener, such that  
10 removal of said tray requires access to and removal of said at least one  
fastener; and,  
a cover mounted to said tray, said cover including a locking mechanism which  
prevents access through an access port to said at least one fastener while  
in a locked position, and allows access through said access port to said  
15 fastener while in an unlocked position.
20. The locking system according to claim 19, wherein said fastener is a threaded  
fastener.
- 20 21. The locking system according to claim 19, wherein said locking mechanism is  
comprised of a key lock, a pawl, a track, and a sliding security plate, such that  
when said key lock is rotated toward a locked position, said pawl slides said  
security plate along said track, covering said at least one fastener of said tray.
- 25 22. The locking system according to claim 19, wherein said locking mechanism is a  
combination lock.
23. The locking system according to claim 19, wherein said locking mechanism is a  
padlock.
- 30 24. The locking system according to claim 19, wherein said locking mechanism is  
positioned at one end of said cover, proximal to said at least one fastener.

25. The locking system according to claim 19, wherein said locking mechanism is positioned distal from said at least one fastener, and said sliding security plate extends to cover said at least one fastener.
- 5 26. The locking system according to claim 19, wherein said tray is anchored to said component rack by two threaded fasteners proximal to a first end of said cover.
27. The locking system according to claim 19, wherein said tray is additionally anchored to said component rack by at least one threaded fastener proximal to a  
10 second end of said cover.
28. The locking system according to claim 19, wherein said cover forms a handle for pulling and pushing said tray in and out of said component rack.
- 15 29. The locking system according to claim 19, wherein said cover is made of a plastic material.
30. The locking system according to claim 19, wherein said sliding security plate is made of a metal material.  
20
31. The locking system according to claim 19, wherein said sliding security plate is made of a plastic material.
32. A method of securing a tray within a component rack, comprising the steps of:  
25 sliding said tray into a closed position within said component rack;  
sliding a security plate within a cover until said security plate covers and inhibits access to an access aperture leading to at least one fastener anchoring said tray into said component rack; and  
activating a locking mechanism located within said cover of said tray and  
30 coupled to said security plate, locking said security plate in place.

33. The method according to claim 32, wherein the locking mechanism is a key lock and the steps of sliding said security plate, and activating said locking mechanism, are carried out by,

inserting a key in a key lock;

5 rotating said key in a first direction causing the rotation of an internal pawl, which in turn slides said security plate along a track until said security plate covers said access aperture to said at least one fastener for anchoring said tray into said component rack; and removing said key activating said locking mechanism.

10

34. The method according to claim 32, wherein the locking mechanism is a combination lock and the steps of sliding said security plate, and activating said locking mechanism, are carried out by,

ensuring a valid combination is entered in said combination lock;

15 sliding said security plate along a track until said security plate covers said access aperture to said at least one fastener for anchoring said tray into said component rack; and entering a combination to lock said combination lock.

20

Abstract

5 A method and apparatus for securing a tray within a computer component rack is disclosed. The tray slidably mounted within the component rack. The tray is anchored to the component rack when in a closed position by at least one fastener. A cover is mounted a front face of the tray. The cover includes within its structure a locking mechanism, which prevents access through an access port to the at least one fastener while in a locked position, and allows access through the access port to the at least one fastener while in an unlocked position.

10

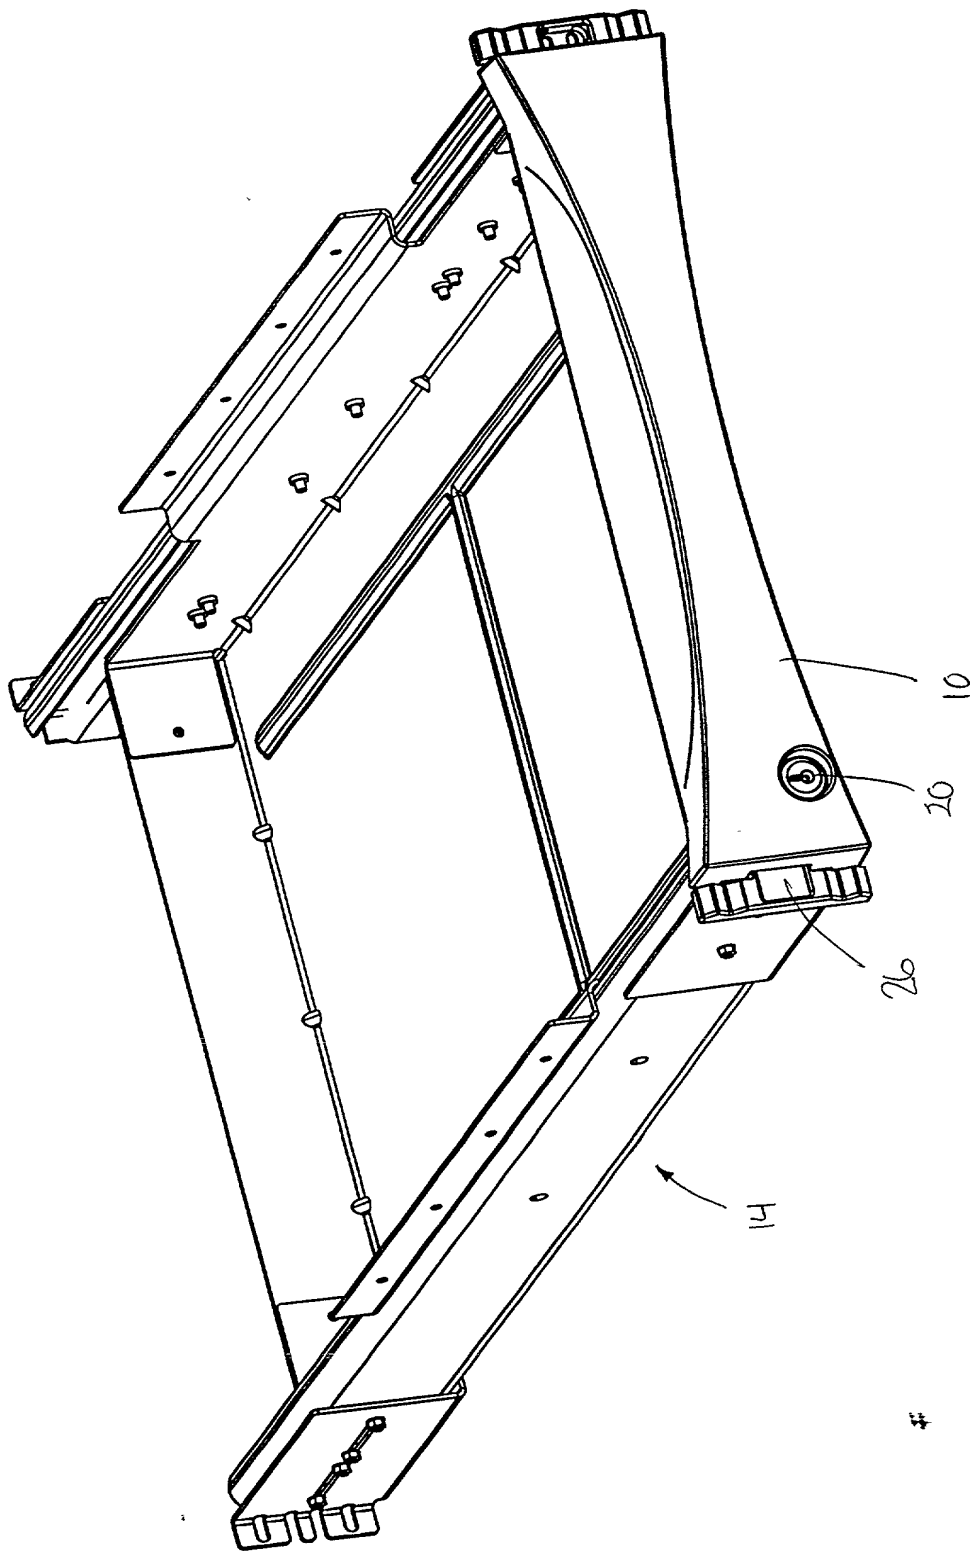


Fig. 1

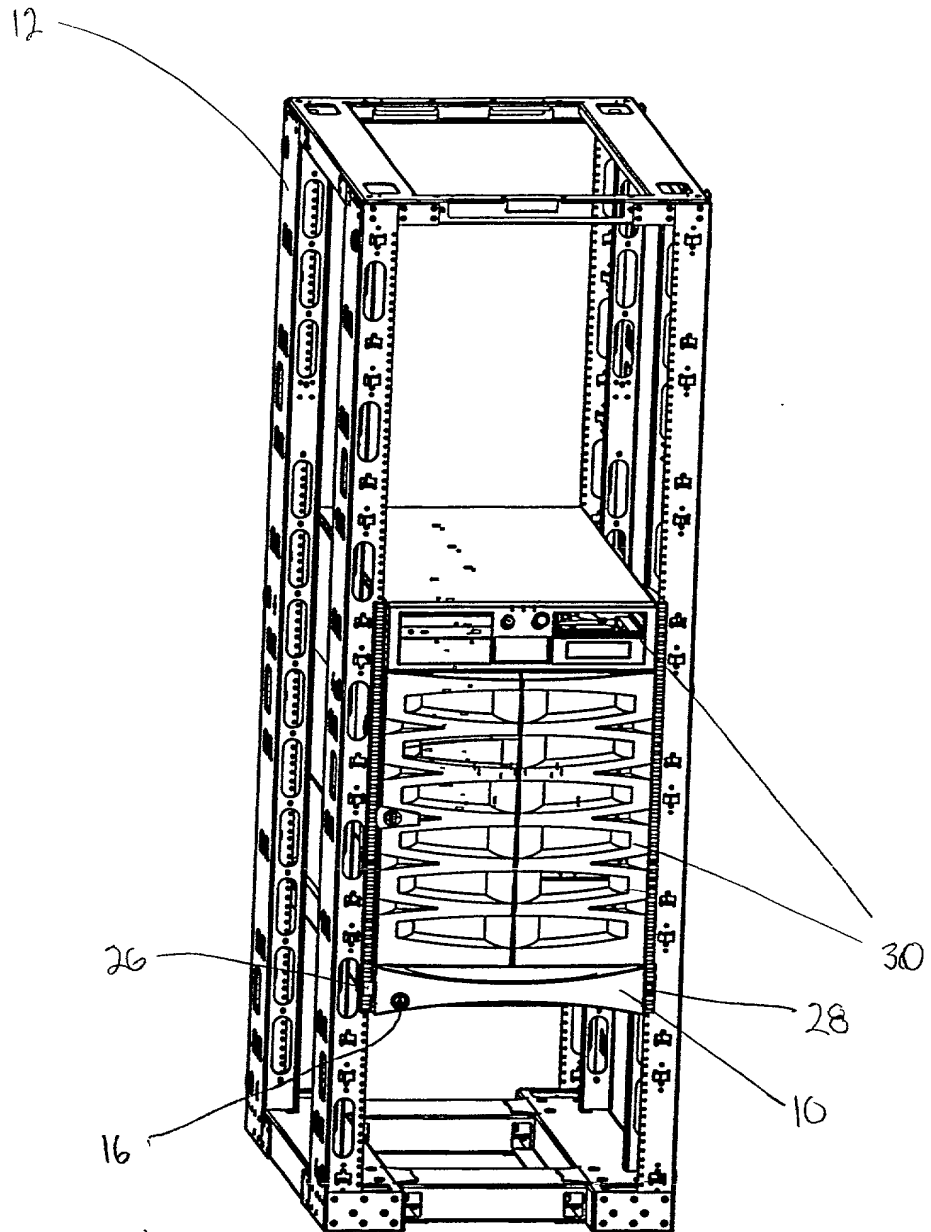


Fig. 2

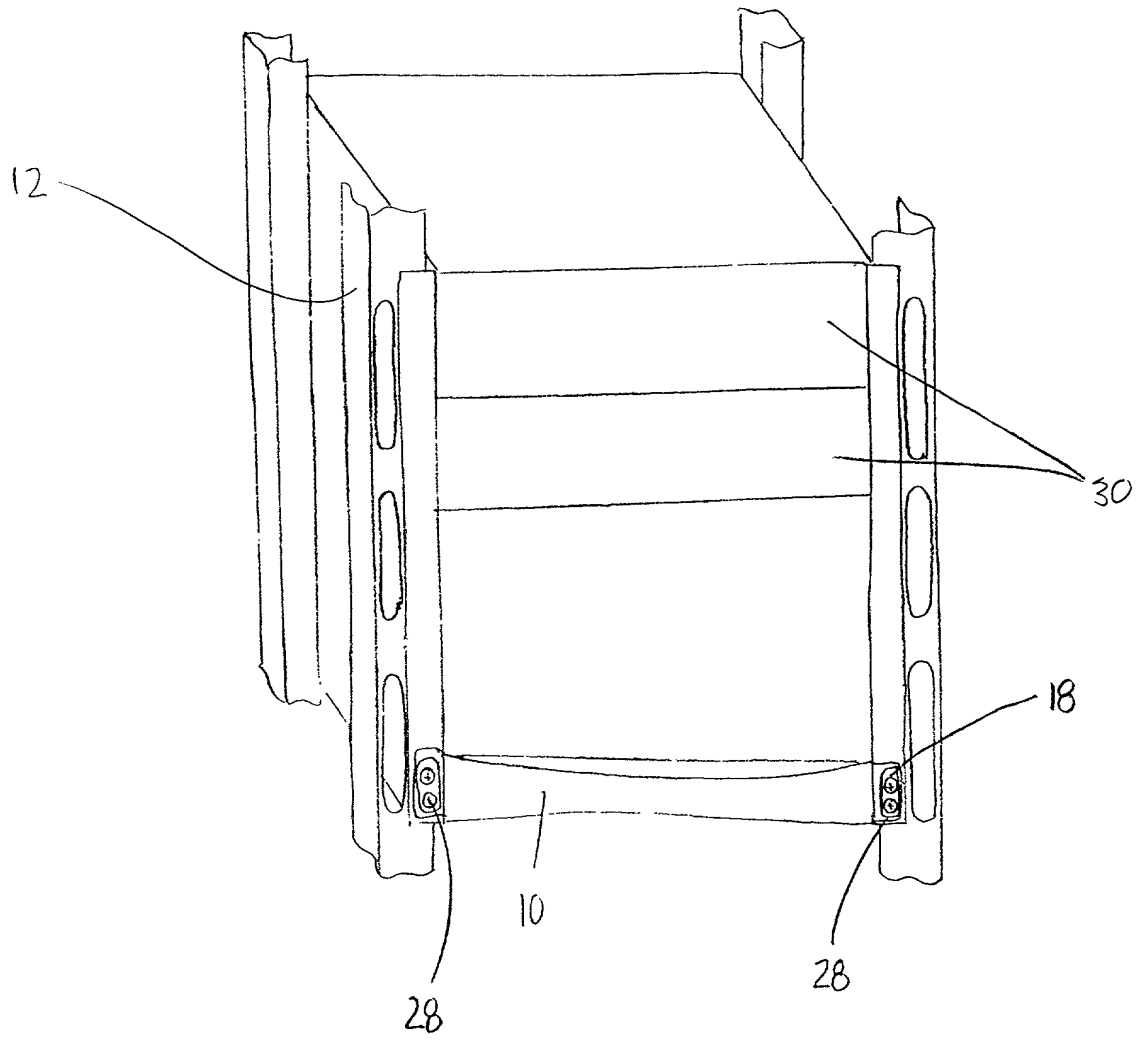


Fig. 3

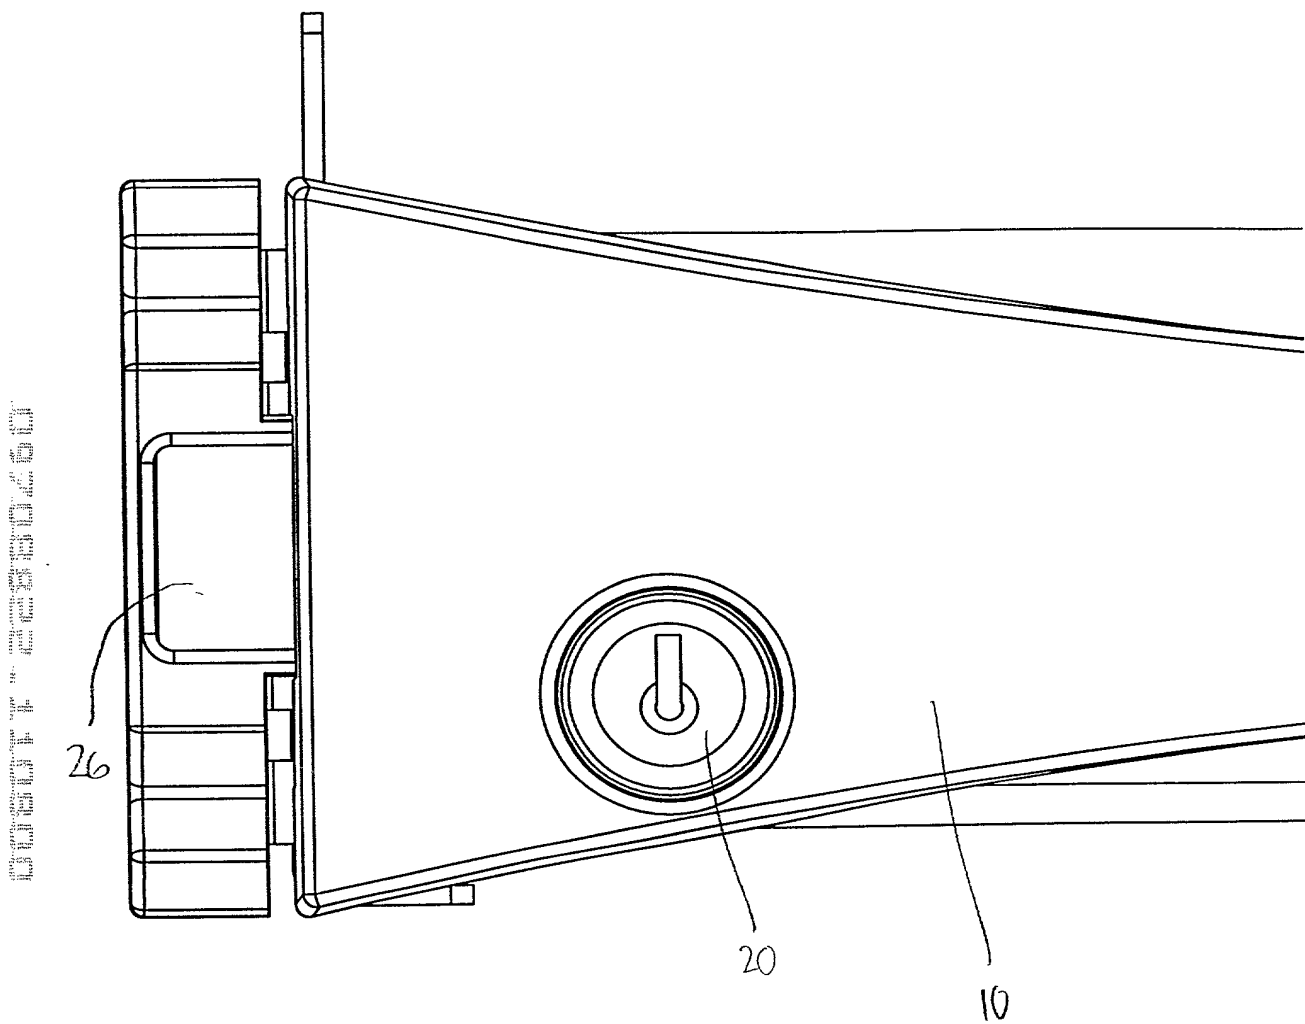


Fig. 4

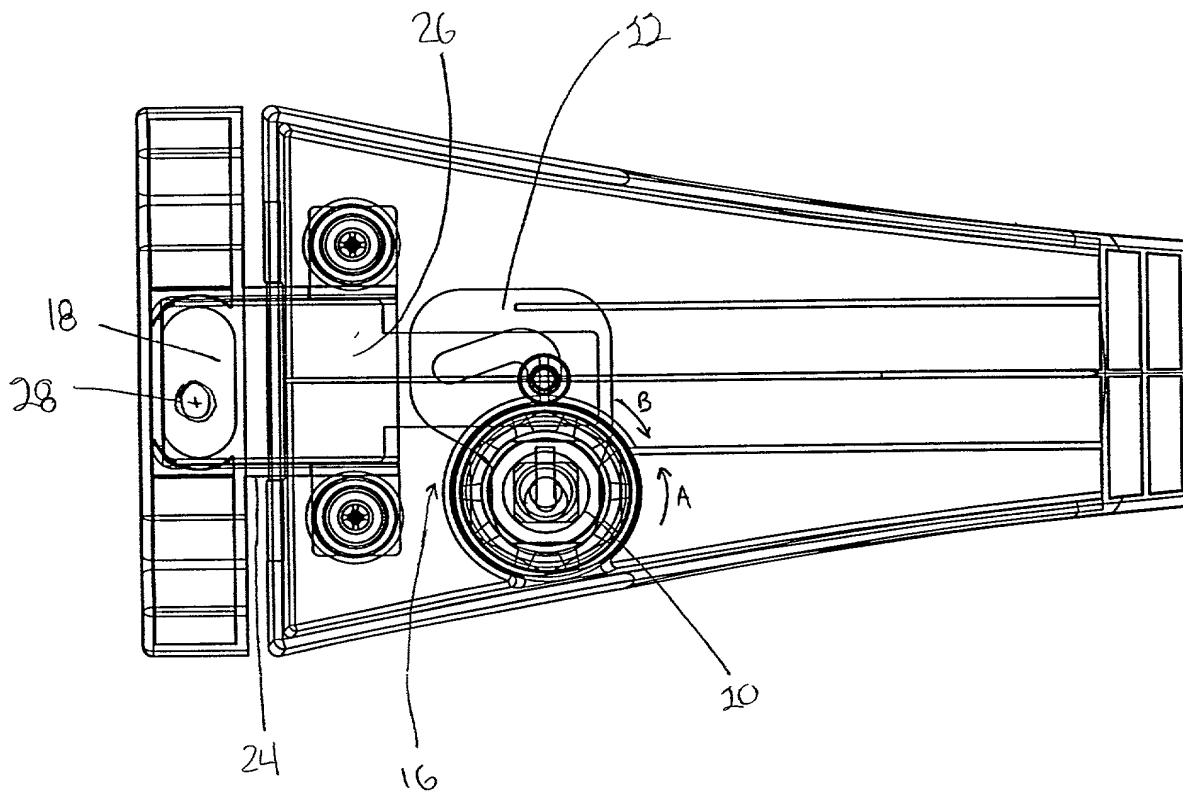


FIG. 5

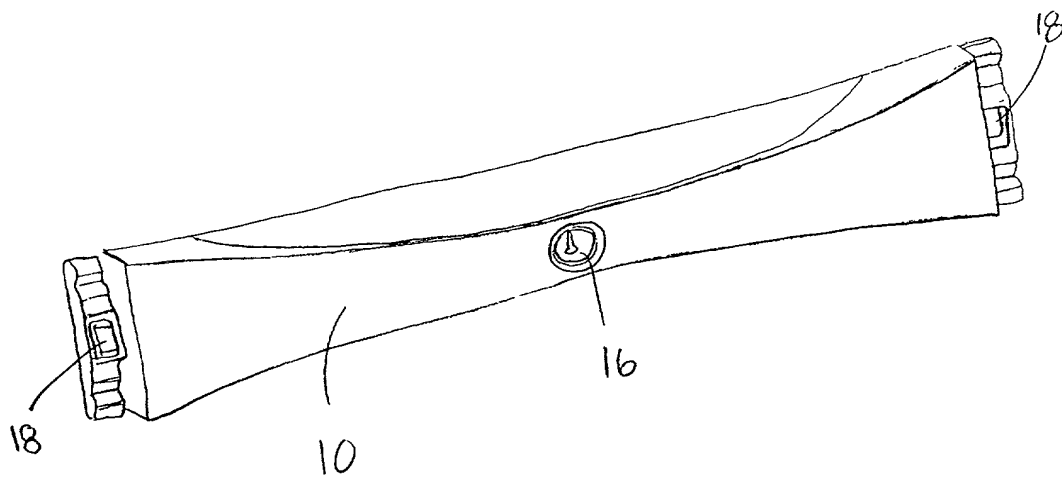
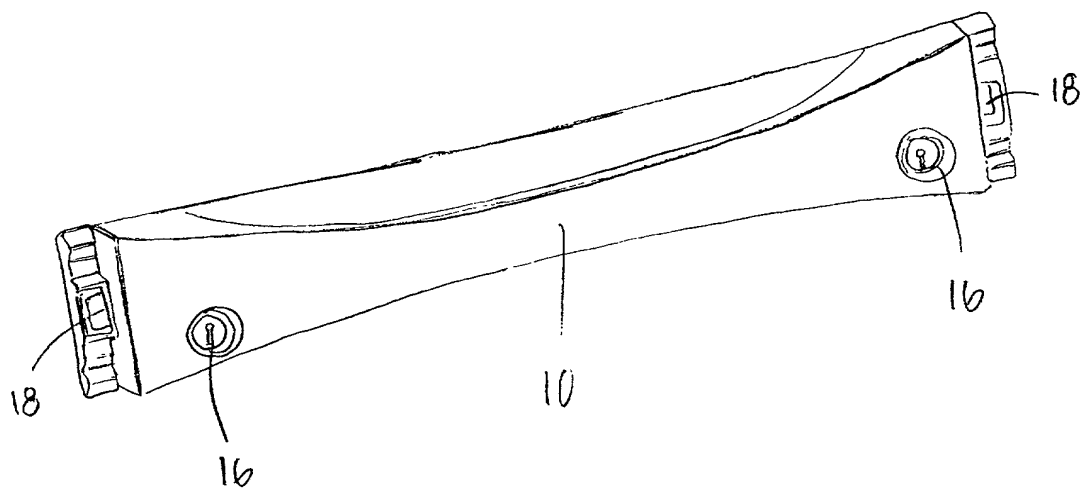


Fig. 6

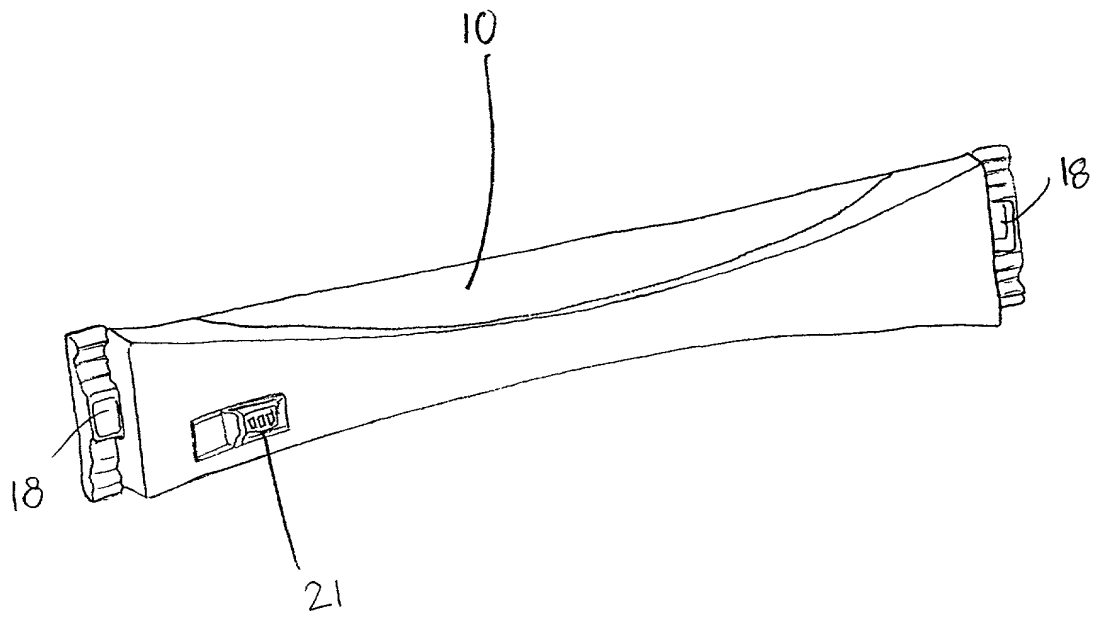


FIG. 7

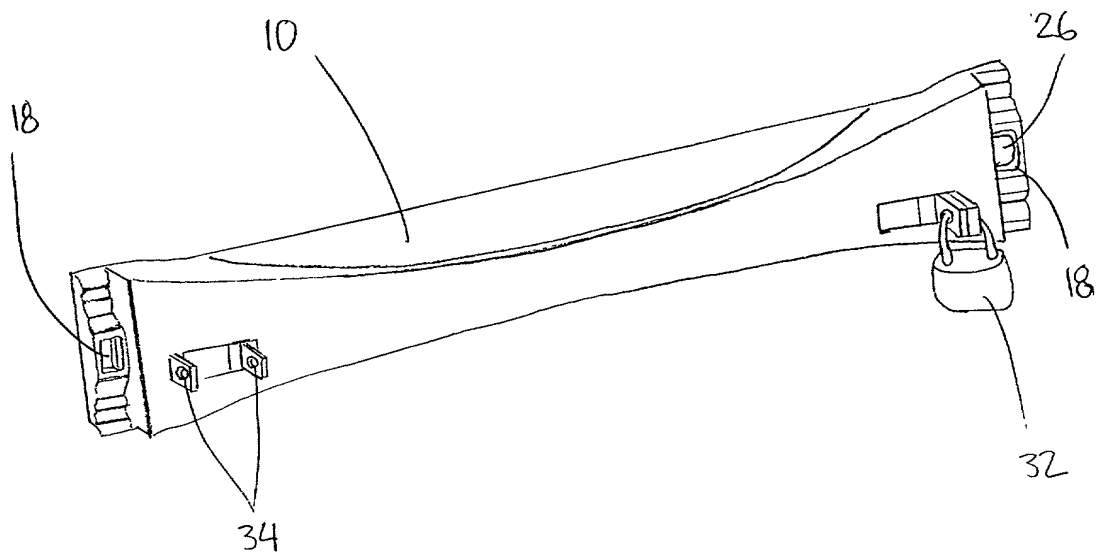


FIG. 8

Customer Number: 000959

Attorney's

Docket

Number SMQ-034

(P4690/MDF)

Declaration, Petition and Power of Attorney for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**RACK SECURITY MECHANISM**

the specification of which

(check one)

X is attached hereto.

   was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I do not know and do not believe that the subject matter of this application was known or used by others in the United States or patented or described in a printed publication in any country before my invention thereof, or patented or described in a printed publication in any country or in public use or on sale in the United States more than one year prior to the date of this application, or first patented or caused to be patented or made the subject of an inventor's certificate by me or my legal representatives or assigns in a country foreign to the United States prior to the date of this application on an application filed more than twelve months (six months if this application is for a design) before the filing of this application; and I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application, that no application for patent or inventor's certificate on the subject matter of this application has been filed by me or my representatives or assigns in any country foreign to the United States, except those identified below, and that I have reviewed and understand the contents of the specification, including the claims as amended by any amendment referred to herein.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

### CLAIM OF BENEFIT OF EARLIER FOREIGN APPLICATION(S)

I hereby claim priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below, and have also identified below any foreign application(s) for patent or inventor's certificate filed by me on the same subject matter having a filing date before that of the application(s) from which priority is claimed.

Check one:

☒ no such applications have been filed.

☐ such applications have been filed as follows

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED WITHIN 12 MONTHS  
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

Country	Application Number	Date of Filing (month,day,year)	Priority Claimed Under 35 USC 119
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS  
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION


### CLAIM FOR BENEFIT OF U.S. PROVISIONAL APPLICATION(S)

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(Application Serial No.)	(Filing Date)
--------------------------	---------------

(Application Serial No.)	(Filing Date)
--------------------------	---------------

# CLAIM FOR BENEFIT OF EARLIER U.S./PCT APPLICATION(S)

I hereby claim the benefit under Title 35, United States Code, §120 of any earlier United States application(s) or PCT international application(s) designating the United States listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the earlier application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date(s) of the earlier application(s) and the national or PCT international filing date of this application. As to subject matter of this application which is common to my earlier application(s), if any, described below, I do not know and do not believe that the same was known or used by others in the United States or patented or described in a printed publication in any country before my invention thereof, or patented or described in a printed publication in any country or in public use or on sale in the United States more than one year prior to the date(s) of said earlier application(s), or first patented or caused to be patented or made the subject of an inventor's certificate by me or my legal representatives or assigns in a country foreign to the United States prior to the date(s) of said earlier application(s) on an application filed more than twelve months (six months if this application is for a design) before the filing of said earlier application(s); and I acknowledge that no application for patent or inventor's certificate on said subject matter has been filed by me or my representatives or assigns in any country foreign to the United States except those identified herein.

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented,pending,aband.)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented,pending,aband.)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

James E. Cockfield	Reg. No. 19,162	Nicholas P. Triano III	Reg. No. 36,397
Thomas V. Smurzynski	Reg. No. 24,798	Peter C. Lauro	Reg. No. 32,360
Ralph A. Loren	Reg. No. 29,325	DeAnn F. Smith	Reg. No. 36,683
Giulio A. DeConti, Jr.	Reg. No. 31,503	William D. DeVaul	Reg. No. 42,483
Ann Lamport Hammitte	Reg. No. 34,858	David J. Ridders	Reg. No. 43,882
Elizabeth A. Hanley	Reg. No. 33,505	Chi Suk Kim	Reg. No. 42,728
Amy E. Mandragouras	Reg. No. 36,207	Maria Laccotripe Zacharakis	Limited Recognition
Anthony A. Laurentano	Reg. No. 38,220		Under 37 C.F.R. § 10.9(b)
Jane E. Remillard	Reg. No. 38,872	Debra J. Milasincic	Reg. No. P46,931
Jeremiah Lynch	Reg. No. 17,425	David R. Burns	Reg. No. P46,590
Kevin J. Canning	Reg. No. 35,470	Sean D. Detweiler	Reg. No. 42,482
Jeanne M. DiGiorgio	Reg. No. 41,710	Peter S. Stecher	Reg. No. P47,259
Megan E. Williams	Reg. No. 43,270	Timothy J. Crean	Reg. No. 37,116
Kennth Olsen	Reg. No. 26,493	Joseph T. FitzGerald	Reg. No. 33,881
Robert S. Hauser	Reg. No. 37,847	Christine S. Lam	Reg. No. 37,489
Alexander E. Silverman	Reg. No. 37,940	Sean P. Lewis	Reg. No. 42,798
Anirma Rakshpal Gupta	Reg. No. 38,275	Bernice B. Chen	Reg. No. 42,403
Michael J. Schallop	Reg. No. 44,319	Noreen A. Krall	Reg. No. 39,734
Kenta Suzue	Reg. No. 45,145	Marc Foodman	Reg. No. 34,330
Richard J. Lutton, Jr.	Reg. No. 39,756	Naren Chaganti	Reg. No. 44,602
		Adam M. Goodmann	Reg. No. 43,640

Send Correspondence to Kevin J. Canning, Esq. at **Customer Number: 000959** whose address is:

Lahive & Cockfield, LLP, 28 State Street, Boston, MA 02109

Direct Telephone Calls to: (name and telephone number)

Kevin J. Canning, Esq., (617) 227-7400

Wherefore I petition that letters patent be granted to me for the invention or discovery described and claimed in the attached specification and claims, and hereby subscribe my name to said specification and claims and to the foregoing declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Yvetta D. Pols Sandhu	
Inventor's signature <i>Yvetta Pols Sandhu</i>	Date 10/19/00
Residence 7 Conant Road, #61, Winchester, MA 01890	
Citizenship United States	
Post Office Address (if different) Same as Above	
Full name of second inventor, if any Jonathan A. Colprit	
Inventor's signature <i>Jon Colpit</i>	Date 10/19/00
Residence 83 Ferrin Street, Apt. 1, Charlestown, MA 02129	
Citizenship United States	
Post Office Address (if different) Same as Above	
Full name of third inventor, if any Robert S. Antonuccio	
Inventor's signature <i>Robert S. Antonuccio</i>	Date 10/19/00
Residence 12 Corcoran Road, Burlington, MA 01803	
Citizenship United States	
Post Office Address (if different) Same as Above	